



camACE MMi2

DYNAMIC • SILENT • ACCURATE



The **MMi2-4** is a **versatile and compact control panel** designed for **efficient and intuitive operation** in robotic camera and motion control systems. Featuring a **32-button color TFT LCD-Keypad**, it provides **user-assignable functions and real-time status feedback**, enabling seamless **camera selection, shot recall, and parameter adjustments**.

Equipped with **four optical pushbutton rotary encoders**, the MMi2-4 allows for **precise, user-configurable control**, making it adaptable to various software functions. A **built-in 4-port USB hub** facilitates the connection of **keyboards, mice, and MMi1 joysticks**, enhancing workflow efficiency.

Designed for **reliability and professional integration**, the MMi2-4 includes **redundant power inputs (2 x 12V DC with lockable 5.5 mm (0.22") connectors)** for **enhanced power failure security**. The unit supports **rear panel mounting** for a **clean, table-top cable-free installation**, maintaining a **tidy and ergonomic workspace**.

Dimensions W x D x H:

210 mm (8.3") x 120 mm (4.7") x 50 mm (2")

Control Interface:

32-button color TFT LCD-Keypad with 4 optical pushbutton rotary encoders

Gross Weight:

Approx. 1,4 kg (3 lbs)

Environmental:

Operating Temperature Range:

0°C - 40°C (32°F - 104°F)

Operating Relative Humidity Range:

8% - 90% (non-condensing)

Construction:

CNC-milled aluminum

Connectivity:

Built-in 4-port USB hub for peripherals

Power:

2 x 12V DC inputs (lockable 5.5mm (0.22") connectors, redundant power)

Mounting:

Rear panel support for concealed cable management

ORDERING INFORMATION

camACE MMi2-4:

SKU: 4010-130-10040

SUPPORT & WARRANTY

Standard Warranty:


1 years hardware warranty

Extended Support:

Available upon request

Software Updates:

Free updates for the first year

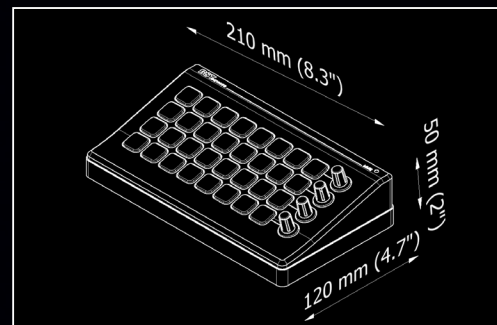

All specifications are subject to change at any time without notice.

To learn more about our solutions, visit:

bstdevices.com

sales@bstdevices.com

© 2025 BST Devices • Datasheet - camACE MMi2 v1.0